

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

SABA

SMALL SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

K22.131.V1K

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K

INDOOR & OUTDOOR USE

MADE IN ITALY

SABA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SABA

K22.000 *



Dimensions and weight

Height: 320 mm
Width: 220 mm
Depth: 192 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



- Perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET(*)



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD SUFFIX


suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	
6,5W filament 8,5W CCT		60W incandescent SAVE up to 89%		

LED LAMPS





Comply with:EU2019/2015
EU2019/2020
Technical details on page 636.

CCT SETTABLE LED LAMP(*)



PHOTOMETRIC DATA SAMPLE



SABA lantern clear with Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 6 lux


The photometric data for all the versions are available upon request or on our website.

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SABA

SMALL SIZE

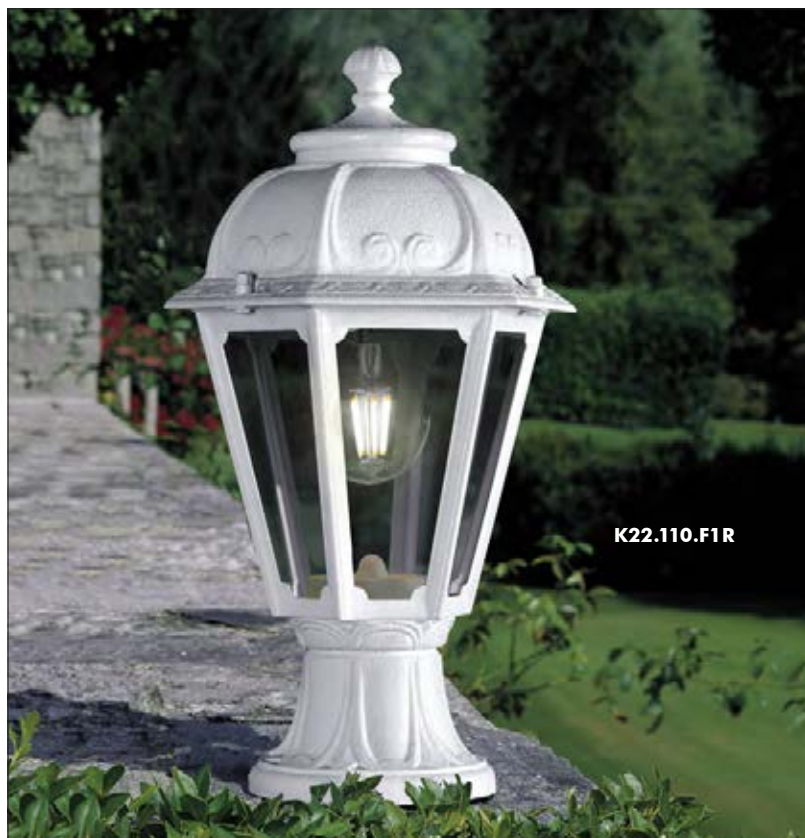

MADE IN
ITALY



BISSEO/SABA	
E27 lampholder	K22.131.E27
6,5W filament	K22.131.F1R
8,5W CCT set	K22.131.V1K
Pcs 18 Kg 21,2 mc 0,209	

SICHEM/SABA	
E27 lampholder	K22.120.E27
6,5W filament	K22.120.F1R
8,5W CCT set	K22.120.V1K
Pcs 18 Kg 21,2 mc 0,209	

SABA	
K22.000	
Pcs 1 Kg 1 mc 0,011	

MIKROLOT/SABA	
E27 lampholder	K22.110.E27
6,5W filament	K22.110.F1R
8,5W CCT set	K22.110.V1K
Pcs 18 Kg 21,2 mc 0,209	

PORPORA/SABA	
E27 lampholder	K22.141.E27
6,5W filament	K22.141.F1R
8,5W CCT set	K22.141.V1K
Pcs 1 Kg 3,5 mc 0,024	

MIZAR/SABA resin	
E27 lampholder	K22.151.E27
6,5W filament	K22.151.F1R
8,5W CCT set	K22.151.V1K
Pcs 1 Kg 2,4 mc 0,044	

ALOE'.R/SABA resin	
E27 lampholder	K22.163.E27
6,5W filament	K22.163.F1R
8,5W CCT set	K22.163.V1K
Pcs 2 Kg 8 mc 0,121	

ARTU'/SABA	
E27 lampholder	K22.158.E27
6,5W filament	K22.158.F1R
8,5W CCT set	K22.158.V1K
Pcs 1 Kg 9 mc 0,148	

SABA

SMALL SIZE



K22.156.S20.V1K



K22.156.S30.F1R



K22.156.S20.F1R

MADE IN
ITALY



SABA



SALEM




SILOE

ARTU' BISSO/SABA 2+1

E27 lampholder	K22.158.S21.E27
6,5W filament	K22.158.S21.F1R
8,5W CCT set	K22.158.S21.V1K


Pcs 1
Kg 12,1
mc 0,176



ARTU' BISSO/SABA 3+1

E27 lampholder	K22.158.S31.E27
6,5W filament	K22.158.S31.F1R
8,5W CCT set	K22.158.S31.V1K


Pcs 1
Kg 13,1
mc 0,176



GIGI BISSO/SABA 2+1

E27 lampholder	K22.156.S21.E27
6,5W filament	K22.156.S21.F1R
8,5W CCT set	K22.156.S21.V1K


Pcs 1
Kg 14,1
mc 0,182



GIGI BISSO/SABA 3+1

E27 lampholder	K22.156.S31.E27
6,5W filament	K22.156.S31.F1R
8,5W CCT set	K22.156.S31.V1K


Pcs 1
Kg 15,1
mc 0,182



ARTU' BISSO/SABA 2L

E27 lampholder	K22.158.S20.E27
6,5W filament	K22.158.S20.F1R
8,5W CCT set	K22.158.S20.V1K


Pcs 1
Kg 11,1
mc 0,176

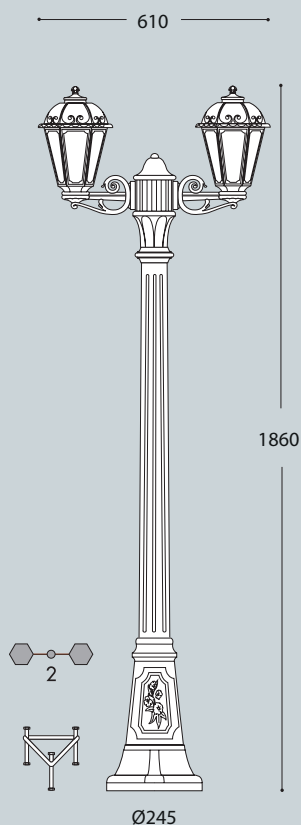

ARTU' BISSO/SABA 3L

E27 lampholder	K22.158.S30.E27
6,5W filament	K22.158.S30.F1R
8,5W CCT set	K22.158.S30.V1K


Pcs 1
Kg 12,1
mc 0,176

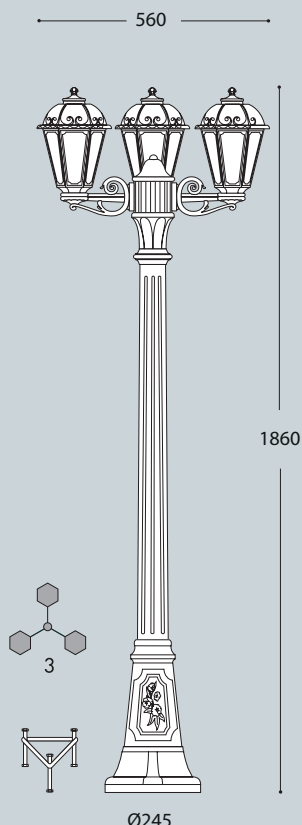

GIGI BISSO/SABA 2L

E27 lampholder	K22.156.S20.E27
6,5W filament	K22.156.S20.F1R
8,5W CCT set	K22.156.S20.V1K

Pcs 1
Kg 13,1
mc 0,182

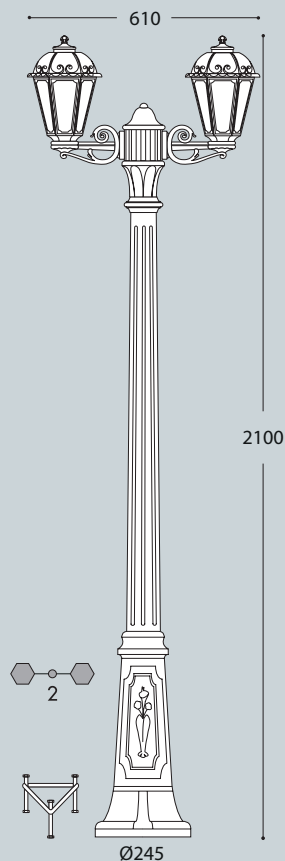

GIGI BISSO/SABA 3L

E27 lampholder	K22.156.S30.E27
6,5W filament	K22.156.S30.F1R
8,5W CCT set	K22.156.S30.V1K

Pcs 1
Kg 14,1
mc 0,182

