


# Engineer | Wall Lamp



## Benefits

- One-piece molding housing, simple and refined appearance
- High-quality engineering plastic housing, high strength, no yellowing
- Long lifespan
- Water resistant grade up to IP65 , outdoor use available

Model	L(mm)	W(mm)	H(mm)
ZDL1110-CF 15W	100	200	42
ZDL1110-CF 20W	135	265	46


170-240V	CRI >80	-20~40°C	IP65	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------



Model	W	PF	lm	BA	Beam Angle	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
ZDL1110-CF 15W	15	0.5	1080/1200	120°	25000	105*47*210	500*440*230	40
ZDL1110-CF 20W	20	0.5	1440/1600	120°	25000	140*50*270	530*300*290	20

## Photometric Data

ZDL1110 -CF-15W

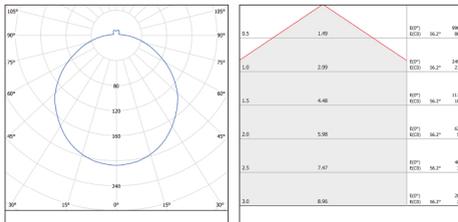

ZDL1110 -CF-20W

