


Classic | Street Light

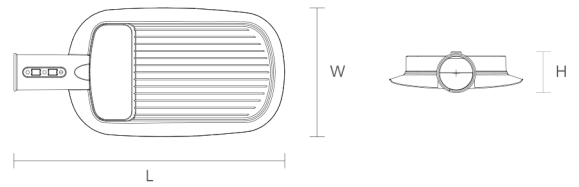

Benefits

- High quality built-in LED driver, easy to install and maintain
- Back fin design, not easy to gather dust, good cooling effect
- Aluminum housing for higher power and brightness


170-240V CRI >= 80 -20~40°C IP65 IK08 3000K/4000K/6500K

Gray


Model	W	PF	lm	BA	Light Icon	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
ZDL1129 30W	30	0.9	3000/3300	70°*140°	30000	180*68*390	395*433*195	6
ZDL1129 60W	60	0.9	6000/6600	70°*140°	30000	207*68*440	455*433*222	6
ZDL1129 100W	100	0.9	10000/11000	70°*140°	30000	225*80*515	530*340*240	4
ZDL1129 120W	120	0.9	12000/13200	70°*140°	30000	240*80*555	570*340*255	4
ZDL1129 150W	150	0.9	15000/16500	70°*140°	30000	250*80*630	645*342*270	4

Photometric Data


ZDL1129-30W

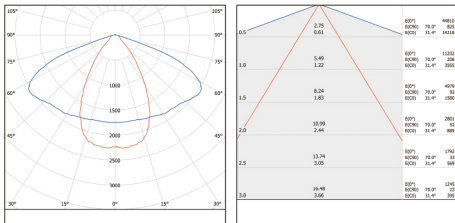


ZDL1129-60W

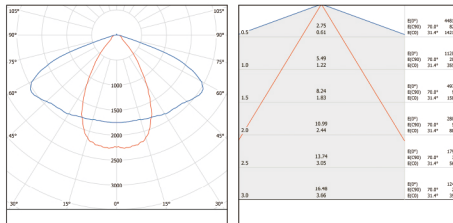

ZDL1129-100W

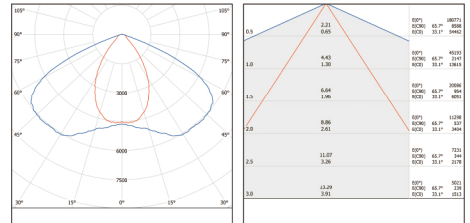

ZDL1129-120W

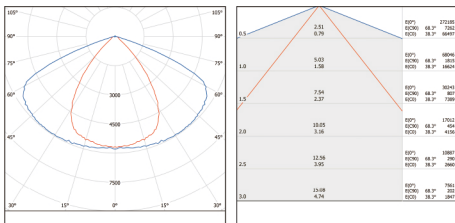

ZDL1129-150W

